


# 90kW/215kWh PV + Hybrid Inverter BESS Solutions



The PV+Hybrid inverter BESS integrated liquid cooling battery pack, battery management system BMS, energy management system EMS, hybrid inverter and fire protection system. The system can be combined with photovoltaic power generation to form a gridtied solar with energy storage system. Multiple systems can be connected in parallel for flexible expansion. The system is suitable for a variety of applications such as , on-grid/offgrid solar energy and storage system, backup power supply, and solar-diesel-microgrid system.

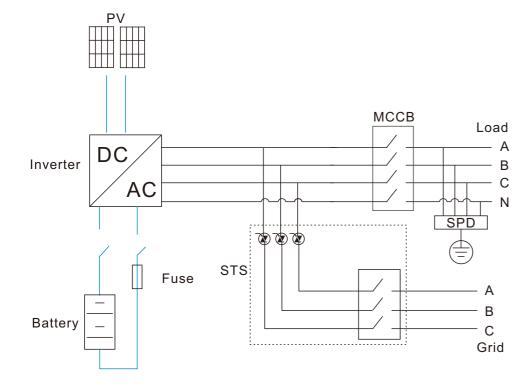

## Hybrid Inverter

| PV Input                        |          |  |  |
|---------------------------------|----------|--|--|
| Max. DC Voltage [V]             | 1100     |  |  |
| Starting Voltage [V]            | 250      |  |  |
| MPPT Voltage Range [V]I         | 250~1000 |  |  |
| Fullload MPPT Voltage Range [V] | 450~850  |  |  |
| MPPT Max.Input Current [A]      | 65       |  |  |
| MPPT Input Strings              | 5+5+5+5  |  |  |
| No. of MPPT                     | 4        |  |  |
| Battery Input                   |          |  |  |
| Max. DC Bus Voltage [V]         | 900      |  |  |
| Max. DC Current [A]             | 165      |  |  |
| DC Voltage Working Range [V]    | 600~900  |  |  |
| DC Voltage Ripple Coefficient   | 2%       |  |  |
| Rated Power [kW]                | 90       |  |  |
| AC Output                       |          |  |  |
| Max. Power Output [kW]          | 99       |  |  |
| Reactive Power Range [kVA]      | 0~90     |  |  |
| Rated Grid Voltage [V]          | 400      |  |  |
| On-Grid Operation               |          |  |  |
| Allowable Grid Voltage [V]      | 304~440  |  |  |
| Rated Grid Frequency [Hz]       | 50/60    |  |  |
| THDi                            | 3%       |  |  |
| Power Factor                    | -1~1     |  |  |
| Power Response [ms]             | <20      |  |  |
| Rated Output Voltage [V]        | 400      |  |  |
| Off-Grid Operation              |          |  |  |
| Voltage Deviation               | 2%       |  |  |
| Rated Output Frequency [Hz]     | 50       |  |  |
|                                 |          |  |  |



| THDi                     | 3%                |  |  |
|--------------------------|-------------------|--|--|
| General                  |                   |  |  |
| Ambient Temperature [°C] | -40~60            |  |  |
| Relative Humidity        | 0~100%            |  |  |
| Noise [dB]               | 59                |  |  |
| Dimensions W*H*D [mm]    | 800*680*330       |  |  |
| Weight [kg]              | 95                |  |  |
| Ingress Protection       | IP65              |  |  |
| Cooling Method           | Smart Air Cooling |  |  |
| Insulation Resistance    | 1ΜΩ               |  |  |
| Communication Interface  | Ethernet, RS485   |  |  |

| Battery                               |                |
|---------------------------------------|----------------|
| Nominal Capacity [Ah]                 | 280            |
| No. of Pack                           | 5              |
| Configurationt                        | 1P240S         |
| Rated Energy [kWh]                    | 215            |
| Rated Voltage [V]                     | 768            |
| Operating Voltage Range [V]           | 672~864        |
| Rated Charging/Discharging Power [kW] | 107            |
| Weight [kg]                           | 2500           |
| Dimensions D*W*H [mm]                 | 1300*1300*2300 |
| Operating Temperature [°C]            | -20~55         |
| Cooling Method                        | Liquid Cooling |
| Ingress Protection                    | IP66           |




| NO. | Name            | Recommended model/<br>Specifications          | QT<br>Y | Remark                        |
|-----|-----------------|---|---------|-------------------------------|
| 1   | Hybrid Inverter | 90kW, 4MPPT, 110%<br>overloading              | 1       |                               |
| 2   | Battery Cabinet | 215kWh, 1P240S, 768V, Liquid<br>cooling       | 1       |                               |
| 3   | Switch Cabinet  | -   | 1       |                               |
| 4   | EMS             | -   | 1       |                               |
| 5   | PV Panels       | Configured based on the capacity requirements | -       | Customer's<br>scope of supply |



#### Grid-connected scenario

A grid-connected BESS offers the ability to capture and store electrical energy when the demand is low and provide electricity when the demand is high. This ability allows the business to operate more efficiently and sustainably.

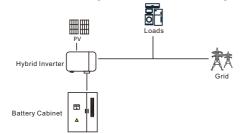






#### Parallel connection scenario

The BESS connected in parallel allows for easier scalability, additional BESS can be added or removed without affecting the existing system. With the parallel connection, the system is able to have more flexibility in terms of system design and operation.

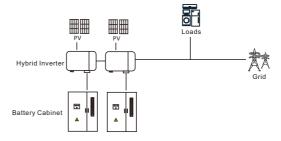

### Microgrid scenario

Combining with solar or diesel generator, the system can become a local energy production and distribution network that can function independently when there is no access to grid.

